



# NEROLAC


## ALL PURPOSE PUTTY

(EXTERIOR & INTERIOR)

### PRODUCT DESCRIPTION

Nerolac All Purpose Putty is premium wall putty specially developed as a base coat to cover unevenness and pinholes in plastered surfaces and to make the walls / ceilings ready for painting. Nerolac All Purpose Putty does not require water curing. It is suitable for both interior and exterior application.

### PERFORMANCE FEATURES & BENEFITS

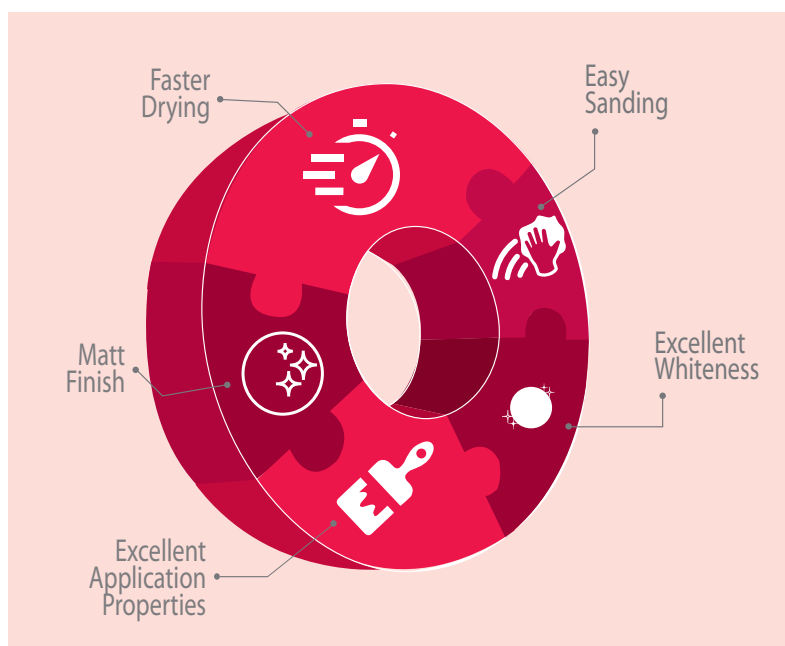

### SURFACE PREPARATION

- 1 Plaster:** New Masonry Surface must be allowed to cure completely. It is recommended to allow at least 4-7 weeks for fully curing.
- 2 Surface Preparation Cleaning:** Growth of fungus, algae, or moss should be removed by wire brushing and water. It should be clean, dry, and well primed.
- 3 Filling For Holes & Dents:** If any dents and holes are present on the underlying surface, please fill them with Nerolac All Purpose Putty. Once the putty is dried completely (18-24 Hours), then rub with 320 sandpaper and apply the finish coat.

### RECOMMENDED USAGE

Excellent adhesiveness and durability. Can be applied on both interior and exterior surfaces. Does not require any curing. Gives a smooth eggshell finish.

### RECOMMENDED SYSTEM FOR APPLICATION

#### For New Masonry Surfaces

#### For Interior Surface



Sand the surface with Emery Paper and wipe clean before application of subsequent coats.

+ Minimum 3-4 hrs. for the first coat. After the second coat, leave the surface to dry, preferably for overnight.

# Please look for the individual finishing system given in respective Product Data Sheet.

#### For Exterior Surface



Sand the surface with Emery Paper and wipe clean before application of subsequent coats.

+ Minimum 3-4 hrs. for the first coat. After the second coat, leave the surface to dry, preferably for overnight.

\*\* Nerolac Impressions Excel Anti Peel, Nerolac Exterior Primer.

# Please look for the individual finishing system given in respective Product Data Sheet.

## TECHNICAL DATA



**COVERAGE\*\***  
45 - 50 sq. ft/ kg / coat.



**DRYING TIME**  
3 hrs



**RECOATING**  
Min. 6 - 8 hrs. (@ 27°± 2°C & RH 60 ± 5% )

**THINNING**  
25 - 35% by volume using water



**FLASH POINT**  
NA



**GLOSS LEVEL**  
Sheen



\*Actual covering capacity may vary depending upon the surface condition, temperature, wind velocity, application skills, surface roughness, surface porosity & quality of substrate.

## PRECAUTIONS



- 01) Refer MSDS for "Nerolac Cement Putty" for safety measures & precautions
- 02) Store in well-ambient conditions, ventilated locations & away from sources of ignition and fire.
- 03) Keep away from children.
- 04) In case of eye / skin contact, wash with plenty of water.
- 05) Inhalation / Injection can be dangerous. In either case, move to fresh air & consult medical practitioners.
- 06) New plaster should be allowed to cure for minimum 12 weeks.
- 07) Do not add excessive water. Mix the paste well before application.
- 08) Apply by using putty knife.
- 09) The bag must be tightly closed when not in use.
- 10) Use safety equipment like rubber or polythene gloves, safety goggles / glasses & face mask.
- 11) Always prepare a required quantity of putty and use it within 2 hrs. of mixing.
- 12) Total thickness of the coats should not exceed 1.5 mm.
- 13) Do not apply when ambient temperature might drop to a level below 10° C within 4 hours of application.
- 14) After thinning, allow the paste to stand for 10 minutes. Remix again to get a uniform paste.

## POST APPLICATION INSTRUCTIONS

Apply primer & finishing coat within 7 - 8 days of application.

**SAFETY FEATURES:**



Non-Flammable.

**PACK SIZES:**



4 kg & 20 kg.

**COLOR:**

White