



NEROLAC


EXCEL MICA MARBLE

ACRYLIC EXTERIOR EMULSION

PRODUCT DESCRIPTION

Nerolac Excel Mica Marble is an extremely durable uv resistant water based exterior emulsion. The special grade of mica and marble provides enhanced barrier protection, paint film reinforcement, increased inter-coat adhesion and toughness. It is also equipped with heat guard technology that keeps home up to 5-degree cooler.

PERFORMANCE FEATURES & BENEFITS

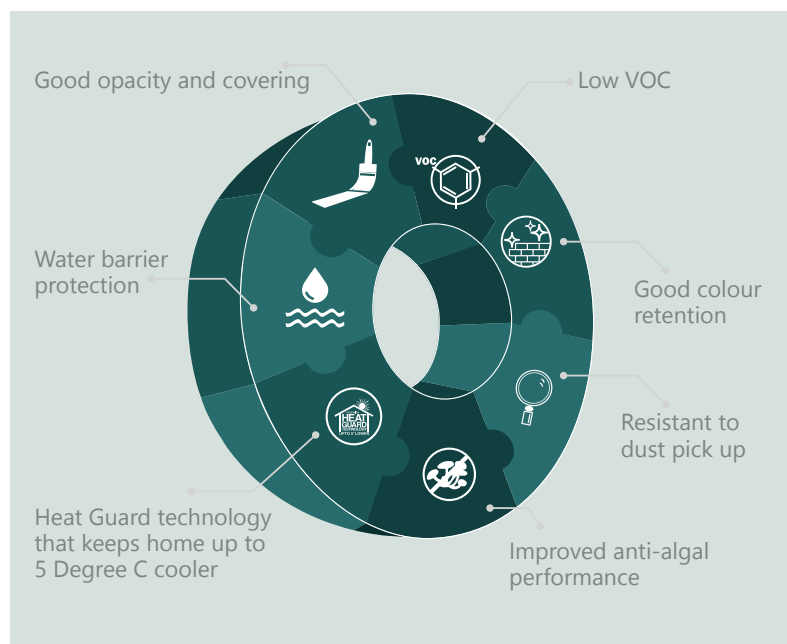

SURFACE PREPARATION

- 1 Ensure the surface is clean, dry, free from all defective or poorly adhering material, dirt, grease, wax etc. Remove all loose or poorly adhering materials by rubbing down, using suitable abrasive paper and thereafter wipe off
- 2 Apply a coat of suitable Nerolac Exterior Primer Sealer followed by Nerolac Exterior Wall Putty to level the dams and make the surface uniform.
- 3 Then apply two to three coats of Nerolac Excel Mica Marbel.

RECOMMENDED USAGE

Recommended for exteriors of houses, architectural and commercial buildings where high standards of surface preparation is required.

RECOMMENDED SYSTEM FOR APPLICATION

1

Thin 1 Liter paint with 300-400 ml of clean water. Apply 2 to 3 coats with an interval of 4 - 6 Hrs by brush or roller. Dark shades may require additional coat for hiding. For Horizontal surfaces and Parapet tops application of one additional coat is recommended for better protection.



TECHNICAL DATA



COVERAGE ***
145 - 165 sq. ft./Ltr/Coat.



DRYING TIME
Surface dry time 30 min



RECOATING
4.00 - 6.00 hrs. (@27°± 2°C & RH 60 ± 5%)



GLOSS LEVEL/SHEEN LEVEL
Soft Sheen



VOC IN GM/L
< or = 5 gm/ltr



THINNING
30 - 40% by volume using water



FLASH POINT
NA



STABILITY OF THINNED PAINT
Use within 24 Hrs



DRY FILM THICKNESS (IN MICRONS)/COAT
25 - 30 : BRUSH
35 - 40 : ROLLER

***- Actual covering capacity may vary depending upon the method & condition of application, surface condition, temperature, wind velocity, application skills, surface roughness, surface porosity and shade

PRECAUTIONS



- 01) Refer MSDS for "Nerolac Excel Mica Marble" for safety measures & precautions.
- 02) Store in well-ambient conditions, ventilated locations & away from sources of ignition and fire.
- 03) Keep away from children.
- 04) In case of eye / skin contact, wash with plenty of water.
- 05) Inhalation / Injection can be dangerous. In either case, move to fresh air & consult medical practitioners.
- 06) Do not apply when ambient temperature might drop to levels below 100 within 4 hrs of application.
- 07) New plaster should be allowed to cure for minimum 12 weeks.
- 08) Avoid extra thinning for better results.
- 09) Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
- 10) The container must be tightly closed when not in use. Stir well and strain before use.
- 11) Use safety equipments like rubber or polythene gloves, safety goggles / glasses & face mask.

POST APPLICATION INSTRUCTIONS

For the best performance of the paint, ensure proper washing and cleaning of all algae and fungus growth at regular interval of 6 months

SAFETY FEATURES:



Non-Flammable.

PACK SIZES:



0.9 Ltr, 3.6 Ltr & 18 Ltr.

COLOR:

As per Excel Mica Marbel Shade Card & Colour Scapes Fandek.

NO. OF SHADES POSSIBLE:

More than 1450

STORAGE:

- Store in a cool & dry place
- Keep away from direct sunlight
- Thinned paint to be consumed within 24 Hrs after thinning

HEALTH & SAFETY PRECAUTIONS



- Avoid inhalation, eye and skin contact. In case of contact, wash with water and seek medical attention.
- Do not pour the leftovers in the drain. Dispose off after natural drying.